


# SCS PTC-II, PTC-IIe Wiring to Kenwood TS-570d

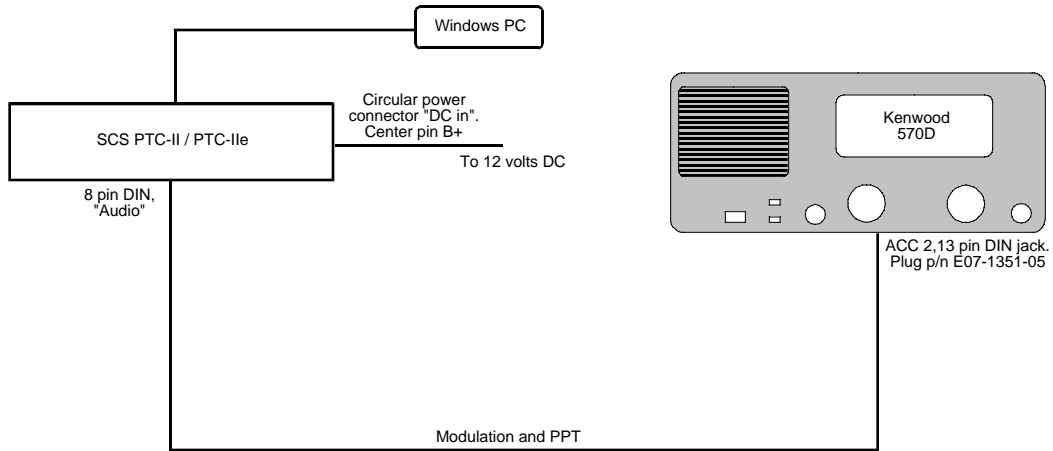


## **MODULATION AND PTT**

PTC-II 8 PIN DIN "AUDIO"	PTC-II COLOR	KENWOOD "ACC 2" PIN NAME	KENWOOD 13 PIN DIN "ACC 2"	FUNCTION
1	VIOLET	PKD	11	AUDIO, SCS TO RADIO
2	WHITE	GND	8	GROUND
3	YELLOW	SS	13	PUSH TO TALK
4	GREEN	ANO	3	AUDIO, RADIO TO SCS
SHELL	SHIELD	GND	12	AUDIO IN SHIELD

NOTE 1            INSULATE UNUSED WIRES.

NOTE 2            **THE RADIO'S MICROPHONE MUST BE REMOVED WHILE TRANSMITTING WITH THE MODEM TO PREVENT MIC AUDIO FROM DEGRADING TRANSMIT PERFORMANCE.**



VIEW INTO BACK OF RADIO  
(INTO BACK OF PLUG)

**Farallon Electronics**  
 2346 B Marinship Way, Sausalito, CA 94965 USA  
 415-331-1924 / voice    415-331-2063 / fax  
 theoffice@yachtwire.com    Copyright Farallon Electronics 1997-2000

Drawn by: \_\_\_\_\_ rev: \_\_\_\_\_